

USER GUIDE

LE3024FLAT

Constant voltage LED driver CV



www.lef-lighting.it



General Characteristics

Plastic case with thickness reduced (FLAT)

Driver for independent mounting

Electric class protection II

Protection degree IP20

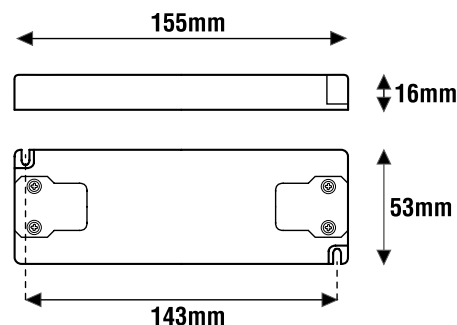
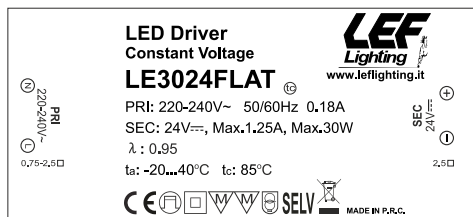


CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza di uscita Output power (W)	Comando Command	Tensione di uscita Output voltage (Vdc)	Corrente di uscita Output current (mA)	PFC (λ)	CC CV	Peso Weight (g)
LE3024FLAT	220-240	50÷60	30	ON-OFF	24	1250	0,95	CV	105

Reference Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62493

Wiring diagram

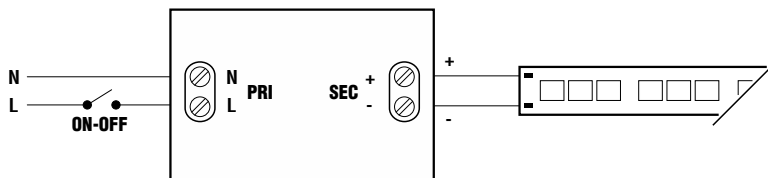

Technical Features

Input voltage range 220-240Vac

Input frequency 50÷60Hz

Constant voltage output 24Vdc

Energy Efficiency (EE): 86%

Open circuit protection (OCP)

Overload protection (OLP)


Protection against overtemperature (OTP)

Short circuit protection (SCP)

Power factor correction (PFC) $\lambda \geq 0,95$

Operating ambient temperature T_a -20°C ÷ +40°C

Max case temperature on T_c 85°C



N.B.

Power supply not suitable for
no-load operation.

ATTENTION:

The installation of the product must be
followed by qualified personnel.
If the product is used for purposes other than
the original ones or if it is connected
incorrectly, LEF Lighting S.R.L. will not accept
any responsibility for damages caused.

MADE IN P.R.C.



PRODUCT TO BE DISPOSED
DIFFERENTLY FROM URBAN WASTE
AEE identification nr.IT18040000010321



LEF LIGHTING S.R.L. | www.lef-lighting.it

Viale L.Ariosto 478/480 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 4217719