USER GUIDE
LE12024SLIM

Constant voltage LED driver

www.leflighting.it

General Characteristics

Plastic case (SLIM)
Driver for indipendent mounting
Electric class protection II
Protection degree IP20

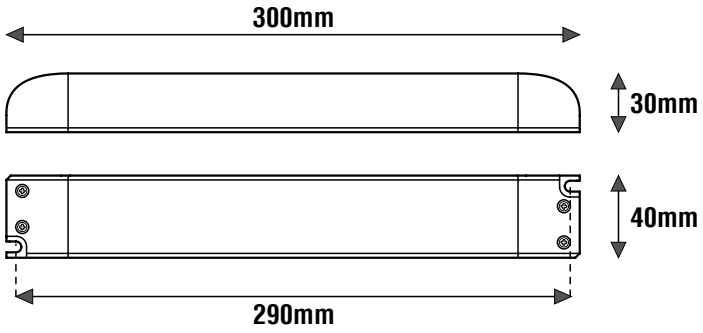

Reference Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

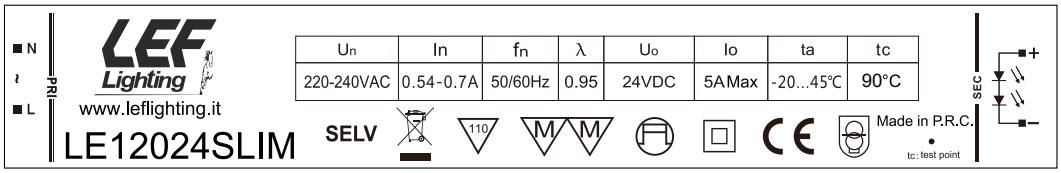

LE12024SLIM

SLIM

LED | EE 89%

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza di uscita Output power (W)	Comando Command	Tensione di uscita Output voltage (Vdc)	Corrente di uscita Output current (mA)	PFC (λ)	CC CV	Peso Weight (g)
LE12024SLIM	220-240	50÷60	**120**	**ON-OFF**	**24**	5000	0,95	CV	400

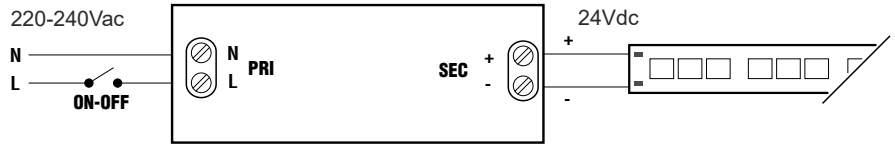



Technical Features

Input voltage range 220-240Vac
Input frequency 50÷60Hz
Constant voltage output 24Vdc
Energy Efficiency (EE) 89%
Open circuit protection (OCP)
Protection against overvoltage (OVP)
Short circuit protection (SCP)
Power factor correction (PFC) λ ≥ 0,95
Operating ambient temperature Ta -20°C ÷ +45°C
Max case temperature on Tc 90°C

N.B.
Power supply not suitable for no-load operation.

ATTENTION:
The installation of the product must be followed by qualified personnel.
If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.

22 PAP

MADE IN P.R.C.

PRODUCT TO BE DISPOSED DIFFERENTLY FROM URBAN WASTE
AEE identification nr.IT18040000010321

CE | SELV | IP20 | ta MAX 45°C | tc MAX 90°C | PFC λ≥0,95 | 120 WATT | DC 24V | CV | 50mm

[AA]Rev. v3.13 25/06/2024

LEF LIGHTING S.R.L. | www.leflighting.it
Viale L.Ariosto 478/480 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92