










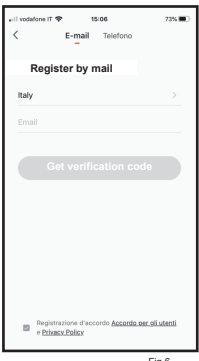
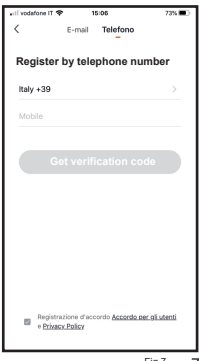


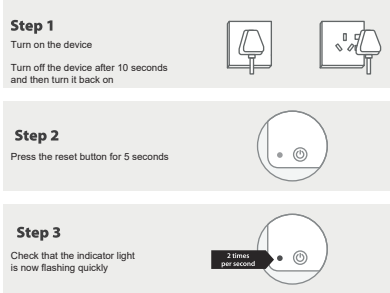


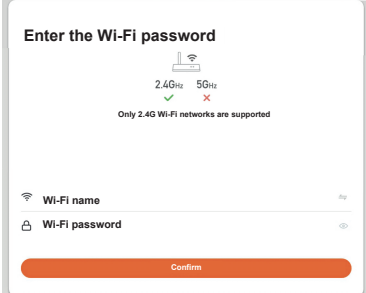
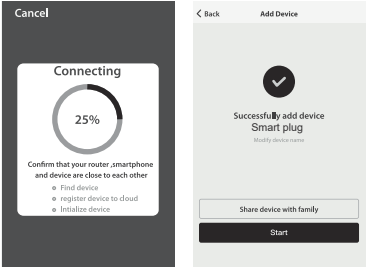




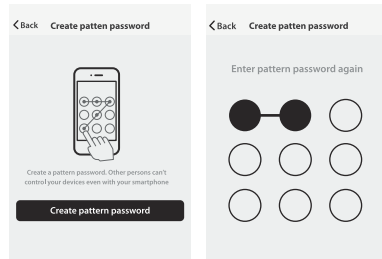
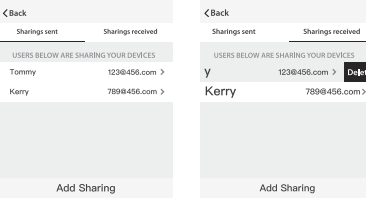

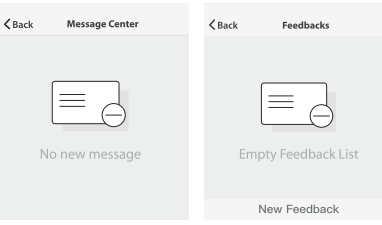

 <p>LEF LIGHTING S.R.L. Via Rodolfo Morandi 9/11 50019 Sesto Fiorentino Tel. 055.4217727 Firenze - ITALY www.lef lighting.it</p>	<h2>User guide</h2> <h3>Wi-Fi Smart Plug</h3> <h2>PS10/ONE</h2> <p>Rated voltage: AC100-250V Rated current:10A Wireless type: 2,4GHz 802.11 b/g/n</p> <div>     </div> <p>Made in P.R.C.</p>	<h3>APP ONESMART</h3> <h4>Android</h4>  <p>Use your smartphone to scan the QR code or search for "OneSmart" in the market to download and install the application</p>
<h3>APP ONESMART</h3> <h4>iOS</h4>  <p>Use your smartphone to scan the QR code or search for "OneSmart" in the market to download and install the application</p>	  <p>Fig.1 Fig.2</p>	<p>NO.1 OneSmart - Registration / Login Sign up for a OneSmart account If you don't have an account, please register or register with SMS verification code. This page describes the registration process. 1.Touch to enter the registration page (Fig.1) and accept the "information for the privacy". 2.The system automatically recognizes your country / area. You can also select your prefix. Enter your phone number or Email and tap "Get Verification Code" as indicated on page 7 (see Fig. 6 and Fig. 7). 3.If you entered the phone number or Email, enter the verification code as indicated in Fig.4, then enter the password and tap "Confirm" to complete the registration. 4.If you have registered the E-mail, enter the password and tap "Confirm" to complete the registration as shown in Fig. 5.</p>    <p>Fig.3 Fig.4 Fig.5</p>
  <p>Fig.6 Fig.7</p>	<p>NO.1 OneSmart - Registration / Login Login with OneSmart username and password</p> <p>1.The system automatically recognizes your country / area. You can also select your prefix. Enter your phone number or e-mail and tap "next". 2.Enter your registered phone number or E-mail and password to login.</p>  <p>Fig.8</p>	<p>NO.2 OneSmart - Add device manually ("Add manually")</p> <p>1.Press "+" at the top right of the page to enter the network connection page Wi-Fi as shown in the figure. There are two types of network connection: manual (manually add) and discovery automatic. The user can press in the upper right corner to change the connection method from manual mode to automatic mode. 3.In manual mode check that the light on the device to be connected is flashing quickly (2 flashes per second), press and go to the next step. 4.If the indicator is not flashing quickly, press "change mode pairing" to see the instructions to follow.</p>  <p>Fig.9</p>
<p>NO.2 OneSmart - Add device manually ("Add manually")</p> <p>Note: how to set the "fast" flashing light on the indicator</p> <p>Step 1 Turn on the device Turn off the device after 10 seconds and then turn it back on</p> <p>Step 2 Press the reset button for 5 seconds</p> <p>Step 3 Check that the indicator light is now flashing quickly</p>  <p>Fig.10</p>	<p>NO.2 OneSmart - Add device automatically ("Automatic detection")</p> <p>1. For this mode check that the indicator lamp is flashing slowly (once every 3 seconds), press and go to the next step. 2. If the indicator is not flashing slowly, press "change mode pairing" to see the instructions to follow.</p>  <p>Fig.9</p>	<p>NO.2 OneSmart - Add device automatically ("Automatic detection")</p> <p>Note: how to set the "slow" flashing light on the indicator</p> <p>Step 1 Turn on the device Turn off the device after 10 seconds and then turn it back on</p> <p>Step 2 Press the reset button for 5 seconds</p> <p>Step 3 Check that the indicator light is now flashing quickly</p> <p>Step 4 Press the reset button for 5 seconds until the indicator flashes slowly</p>  <p>Fig.10</p>

<p>NO.2 OneSmart - Add device - Enter Wi-Fi password Enter Wi-Fi password</p> <p>Select the Wi-Fi under which device is working, enter password and confirm to enter network connection process.</p>  <p>Fig.11</p>	<p>NO.2 OneSmart - Add device Network connection process</p> <p>If the "manual" mode is set to connect the device, the application will carry out the process as shown in Fig.12. Once the process is finished, the screen will appear as in Fig. 13.</p>  <p>Fig.12</p> <p>Fig.13</p>	<p>NO.3 OneSmart - Device Control Device configuration</p> <p>After you have successfully configured the device, it will appear on the home page. Select the device to control it.</p> <p>Note: 1. When the device is "online", the control screens are available. 2. When the device is "offline", it cannot be controlled.</p> 
<p>NO.3 OneSmart - OneSmart - Scenarios OneSmart scenarios ("Smart")</p> <p>The device allows you to create scenarios (press on "Smart") and will perform actions under certain conditions.</p> 	<p>NO.4 OneSmart - Profile OneSmart profile ("Mi")</p> <p>On the "Profile" page, users can manage the following main information:</p> <ul style="list-style-type: none"> - Personal informations - Device Sharing: View information about shared devices - Message center - FAQ and feedback - Configure 	<p>NO.4 OneSmart - Profile OneSmart profile ("Profile")</p> <p>The "profile" page contains all the personal information of the account. You will be able to change the login password, add the phone number and set the unlock pattern for the page.</p> 
<p>NO.4 OneSmart - Account and security Profile - Unlock pattern</p> <p>Select "Gesture password" to set your unlock pattern which you will then need to set to use the application</p> 	<p>NO.4 OneSmart - Shares Profile - Shares</p> <p>Send share The list shows all members who have been added from your account. You can delete a member and delete the share by swiping left.</p> <p>Shares received The list shows all the devices that have been shared with you. You can delete the share by swiping left</p> 	<p>NO.4 OneSmart - Profile Profile - Account and security Add share ("Link Telephone Number")</p> <p>As shown in the figure, the user can enter the phone number of a new member and share the device with him. The new member will be able to control the shared device.</p> 
<p>NO.4 OneSmart - Profile Profile - Message Center - FAQ and Feedback</p> <p>Message center Includes notifications of new devices and shares.</p> <p>FAQ and feedback Where users can post their feedback and shares.</p> 	<p>NO.4 OneSmart - Profile Profile - Configure info</p> <p>1. Selecting "Configure" and "Info" you will be directed to the corresponding app market where you can:</p> <ul style="list-style-type: none"> - Evaluate the app - You will be able to check the version of the OneSmart app - Check for OneSmart app updates 	<p>NO.5 Third party control supported</p> <p>This product supports third party control (Amazon Echo and Google Home). To find out how to use third-party apps, you can press in the upper right corner of the device control screen.</p> 