

USER GUIDE

LEDALIPOWER

DALI line power supply





www.lef lighting.it

General Characteristics


Plastic case
Device for independent mounting
Electric class protection II
Protection degree IP20

Technical Features

Input voltage range 110÷240Vac
Input frequency 50÷60Hz
BUS DALI output voltage 16÷20,5Vdc
Output power 5W
Output current 250mA
This power supply supplies current on the DALI bus up to a maximum of 64 standard DALI power supplies (<2mA)
Energy Efficiency (EE) 62%
Operating ambient temperature T_a -10°C ÷ +40°C
Max case temperature on T_c 60°C

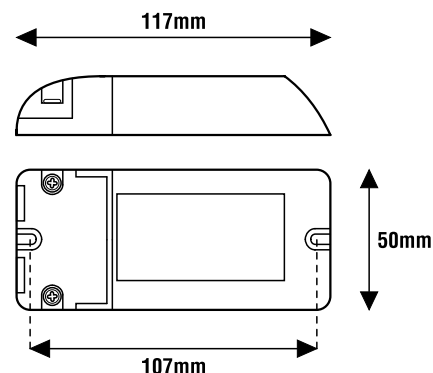

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Prodotto Product	Corrente di uscita Output current (mA)	Alimentatori DALI controllabili DALI power supplies controllable (n°)	Peso Weight (g)
LEDALIPOWER	110-240	50÷60	ALIMENTATORE DI LINEA DALI	250	64	90




N.B.


Power supply not suitable for
no-load operation.

ATTENTION:

The installation of the product must be
followed by qualified personnel.
If the product is used for purposes other
than the original ones or if it is connected
incorrectly, LEF Lighting S.R.L. will not
accept any responsibility for damages
caused.

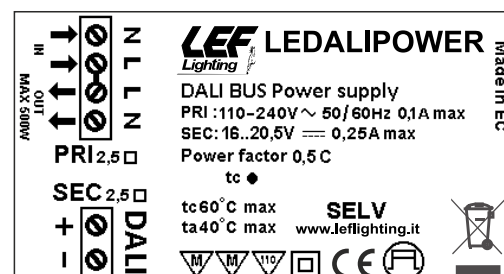

Wiring diagrams

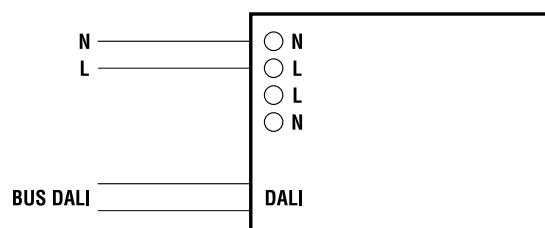

Reference standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62386-101
EN 62493



PRODUCT TO BE DISPOSED DIFFERENTLY
FROM URBAN WASTE
AEE identification nr.JT18040000010321



MADE IN EC

LEF LIGHTING S.R.L. | www.lef lighting.it

Viale L.Ariosto 478/480 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92