

Relè passo-passo (bistabile) elettronico con comando a pulsante

Electronic (bistable) step relay with push-button control

PUSH



con funzione **BISTABILE** e comando di **RESET** | with **BISTABLE** function and **RESET** control

General Characteristics


Plastic case
Filled with polyurethane resin
Electric class protection II
4 wires system

Technical Features

Input voltage range 230Vac
Input frequency 50Hz
Silent electronic bistable step relay
Centralized shutdown via RESET button
Control thorough:
- push-button (PUSH 230Vac)
Manageable power (see table)
«STATE MEMORY» function
Self-consumption: none
Operating ambient temperature Ta -5°C ÷ +35°C

Reference Standards

EN 60669-1
EN 60669-2-1




Caratteristiche Costruttive

Contenitore plastico
Resinato con resina poliuretanic
Classe elettrica di protezione II
Sistema a 4 fili

Caratteristiche Tecniche


Tensione di ingresso 230Vac
Frequenza di ingresso 50Hz
Relè passo-passo bistabile elettronico silenzioso
Spegnimento centralizzato tramite pulsante di RESET
Comando tramite:
- pulsante (PUSH 230Vac)
Potenza gestibile (vedi tabella)
Funzione «MEMORIA DI STATO»
Autoconsumo: nessuno
Temperatura ambiente di funzionamento Ta -5°C ÷ +35°C

Norme di Riferimento

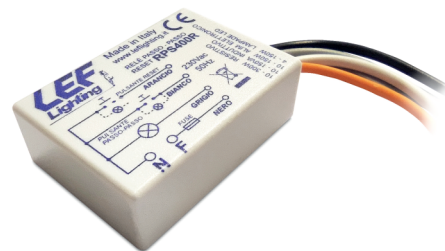

Wiring diagram

Schema elettrico

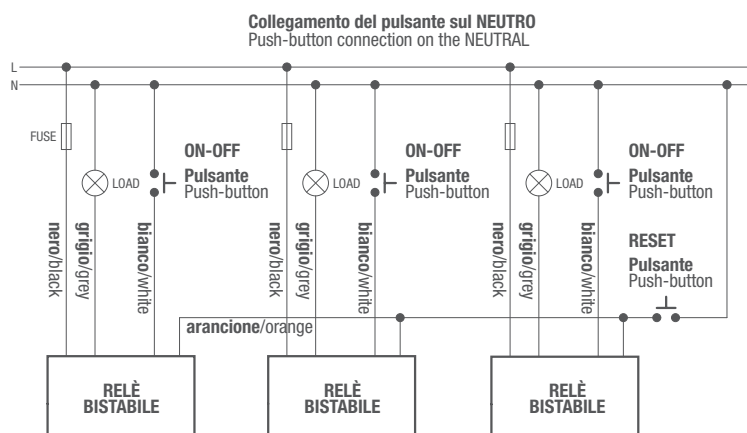

ON-OFF PUSH 230Vac	OUT BISTABILE	OUT RELE
--------------------------	------------------	-------------

CODICE CODE	Funzione Function	Comando Command	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico per LED Electronic driver with CC/CV output for LED	Lampade fluorescenti compatte Compact fluorescent lamps 230Vac	Lampade LED LED lamps 230Vac	Moduli LED LED modules Seoul ACRICH 230Vac	Strip LED Strip LED 230Vac	Peso Weight (g)
RPS400R	RELÈ	PUSH	10-300W	10-150VA	10-150VA	10-150W	10-150W	10-150W	4-150W	10-150W	4-150W	40

