


WALL-200/ONE

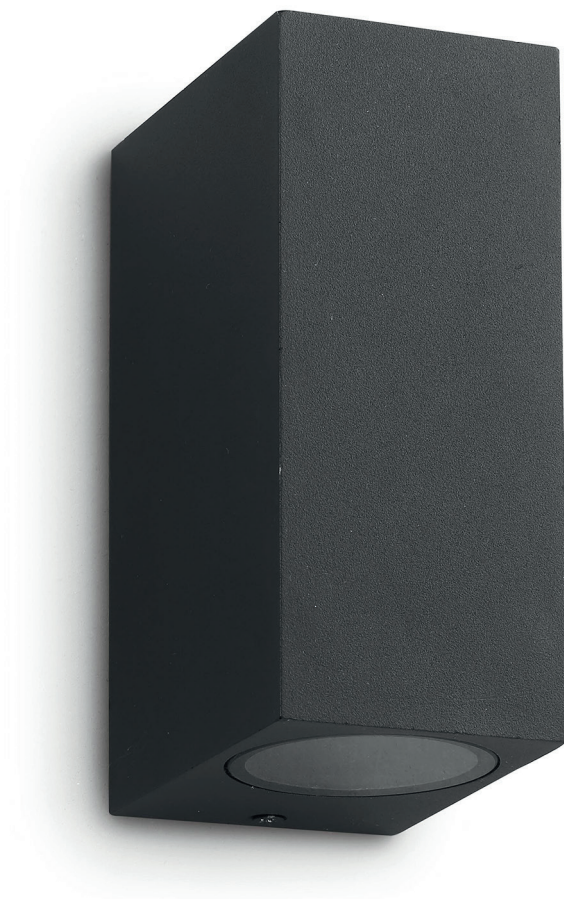

Lampada IP54 monocolor 3000K da parete non dimmerabile.

Alimentazione 230Vac, 2x5W.

Ricevente 433.92 MHz per trasmettitori radio.

Connessione Wi Fi per applicazione "OneSmart"

IP54 single color 3000K non-dimmable wall lamp.



Power supply 230Vac, 2x5W.

433.92 MHz receiver for radio transmitters.

Wi Fi connection for "OneSmart" application

1. DATI TECNICI

Alimentazione	220-240V
Potenza	2 X 5 W
Temperatura della luce	3000K
Grado di protezione	IP54
Dimensioni	68 X81 X 150 mm

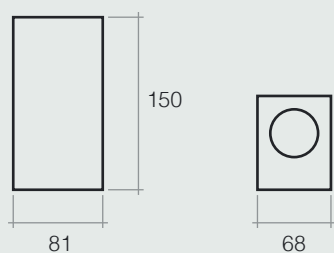



2. COLLEGAMENTI ELETTRICI

- Aprire il carter per accedere alla morsettiera di alimentazione
- Vedere il manuale della centrale elettronica per i collegamenti e le programmazioni

ATTENZIONE: Dopo aver effettuato i collegamenti si consiglia di isolare il passaggio cavi con del silicone

1. TECHNICAL DATA

Power supply	220-240V
Power	2 X 5 W
Light temperature	3000K
Degree of protection	IP54
Dimensions	68 X 81 X 150 mm

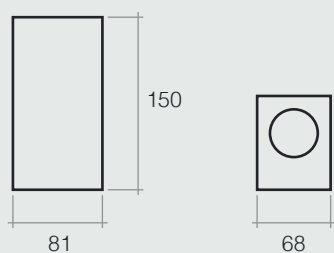

2. ELECTRICAL CONNECTION

- Open the casing to access the power supply terminal block
- See the electronic control unit manual for connections and programming

ATTENTION: After the connections it is advisable to insulate the cable passage with silicone



LEF LIGHTING S.R.L.

Via Rodolfo Morandi 9/11

50019 Sesto Fiorentino

Tel. 055.4217727

Firenze - ITALY

www.leflighting.it