

# Varialuce universale comandabile con segnale DALI

## Universal dimmer controlled by DALI signal

DALI



con funzione manuale di indirizzamento canali DALI | with manual DALI channel addressing function

### General Characteristics

Plastic case  
Device for independent mounting  
Electric class protection II  
Protection degree IP20

### Technical Features

Input voltage range 110-240Vac  
Input frequency 50÷60Hz  
**2-channel dimmer with Phase-cut output (IGBT)**  
**Dimming control through:**  
- DALI signal  
**With manual DALI channel addressing function**  
(via push-buttons and display)  
DALI consumption 2mA  
Manageable power (see table)  
Protection against overtemperature (OTP)  
Operating ambient temperature Ta -20°C ÷ +50°C  
Max case temperature on Tc 75°C

### Reference Standards

EN 62386-101  
EN 62386-102  
EN 62386-207


### Caratteristiche Costruttive

Contenitore plastico  
Dispositivo ad uso indipendente  
Classe elettrica di protezione II  
Grado di protezione IP20

### Caratteristiche Tecniche


Tensione di ingresso 110-240Vac  
Frequenza di ingresso 50÷60Hz  
**Dimmer a 2 canali con uscita a Taglio di Fase (IGBT)**  
**Comando di dimmerazione tramite:**  
- segnale DALI  
**Con funzione manuale di indirizzamento canali DALI**  
(tramite pulsanti e display)  
Consumo DALI 2mA  
Potenza gestibile (vedi tabella)  
Protezione alla sovratemperatura (OTP)  
Temperatura ambiente di funzionamento Ta -20°C ÷ +50°C  
Temperatura massima sul punto Tc 75°C

### Norme di Riferimento

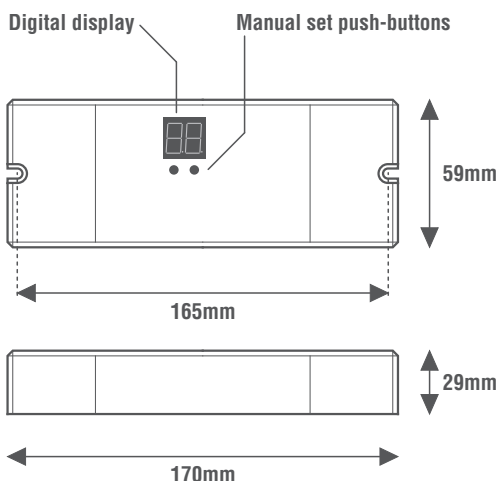

### Wiring diagram

### Schema elettrico

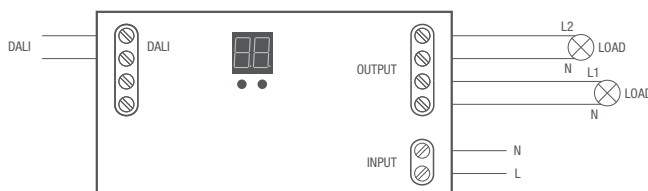

Dimmerazione a Taglio di Fase discendente (a fine fase) TE Trailing Edge  
Descending Phase Cutting dimming (at the end of the phase) TE Trailing Edge

CODICE CODE	Comando Command	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare e toroidale Laminated and toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico con lampade LED dimmerabili Electronic driver with dimmable LED lamps 230/12Vac	Alimentatore elettronico dimmerabile con uscita in CC/CV per LED Dimmable electronic driver with CC/CV output for LED 230/144W	Lampade fluorescenti compatte dimmerabili CFL Dimmable compact fluorescent lamps CFL 230Vac	Lampade LED dimmerabili Dimmable LED lamps 230Vac	Moduli LED dimmerabili Dimmable LED modules Seoul ACRICH 230Vac	Strip LED dimmerabili Dimmable Strip LED 230Vac	Peso Weight (g)
SR-2303AC	DALI	2x288W	-	2x144W	2x144W	2x144W	2x144W	2x144W	2x288W	2x288W	180

