

USER GUIDE

Code: LEDALI-PUSH, LEDALI-0-10, LEDALI-1-10
DALI signal generator




General Characteristics


Plastic case
Device not for independent mounting
Electric class protection II
Protection degree IP20

Reference standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-11
EN 61547
EN 62386



CODICE CODE	Tensione di ingresso Input voltage	Comando Command	Uscita di segnale Signal output	Consumo DALI DALI consumption (mA)	Peso Weight (g)
LEDALI-PUSH	BUS DALI	PUSH	DALI	100	30
LEDALI-0-10		0-10V (attivo)			
LEDALI-1-10		1-10V (passivo)			

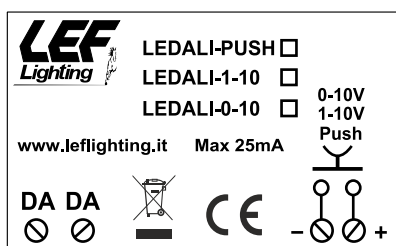

1	2	Mode	Selettore all'interno Dip Switch inside
ON	OFF	PUSH	
OFF	ON	0..10V	
ON	ON	1..10V	
OFF	OFF	PUSH Timer 3 min	

ATTENTION:

The installation of the product must be followed by qualified personnel.

If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.

N.B. The device does not supply the DALI bus and it is therefore necessary to use an external DALI line power supply (LEDALIPOWER).

When used as interface, BUS DALI must be set at a voltage higher than 15V .
Use a cable suitable for DALI signal up to 300m, max voltage drop allowed 2V.

Technical Features

Input voltage range BUS DALI

Device for controlling DALI power supplies

Brightness adjustment through:

- push-button(PUSH no voltage) (LEDALI-PUSH)
- 0-10V signal (active) (LEDALI-0-10)
- 1-10V signal (passive) (LEDALI-1-10)
- potentiometer 47Kohm (linear or logarithmic)

This systems send (in broadcast) DALI commands, it is not necessary to set the addresses of the DALI power supplies connected to the BUS.

Operating ambient temperature Ta -10°C ÷ +40°C



PRODUCT TO BE DISPOSED DIFFERENTLY FROM URBAN WASTE

AEE identification nr.IT18040000010321




MADE IN ITALY

USER GUIDE

Code: LEDALI-PUSH, LEDALI-0-10, LEDALI-1-10
DALI signal generator



Wiring diagram LEDALI-PUSH with PUSH button

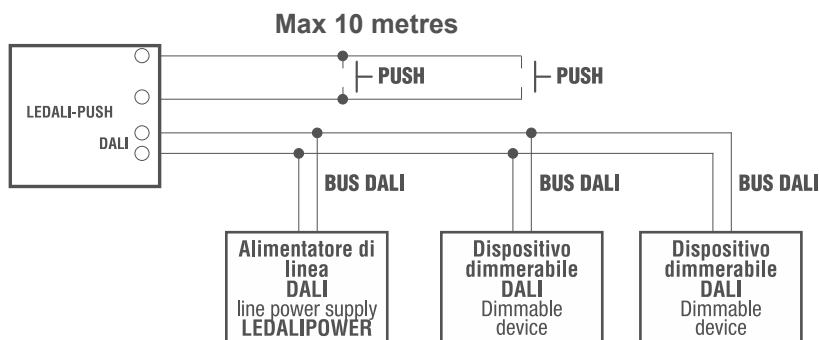


Dimming 0% → 100%

1	2	Mode
ON	OFF	PUSH

Dip Switch inside

Wiring diagram LEDALI-PUSH with PUSH button and TIMER function

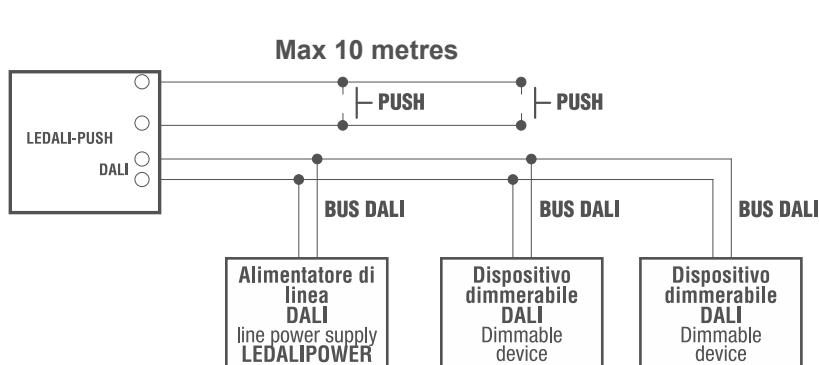


Dimming 0% → 100%

1	2	Mode
OFF	OFF	PUSH Timer 3 min

Dip Switch inside

To change the functionality of the product and set the TIMER function, switch off the device and remove the cover to access the selector inside

Wiring diagram for LEDALI-0-10 with 0-10V signal input

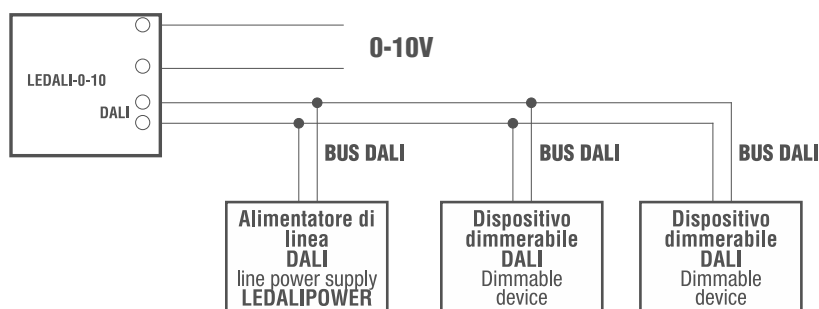


Dimming 0% → 100%

1	2	Mode
OFF	ON	0..10V

Dip Switch inside

Wiring diagram for LEDALI-0-10 with 0-10V signal input or potentiometer 47Kohm (linear or logarithmic)

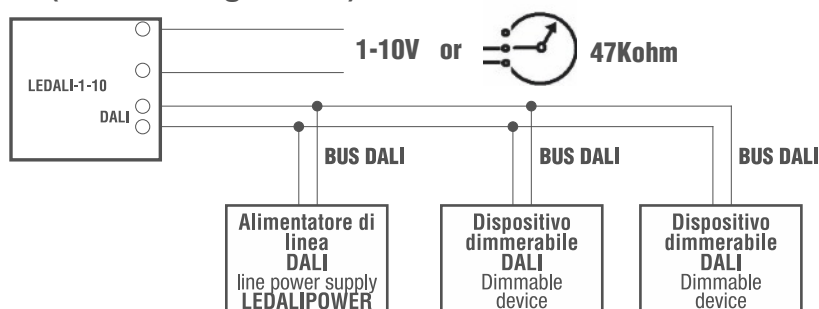

Dimming 10% → 100%

1	2	Mode
ON	ON	1..10V

Dip Switch inside