

USER GUIDE

RPS400DIN


Electronic (bistable) step relay with push-button control



www.lef Lighting.it

General Characteristics


DIN rail plastic case (1 module)
 Electric class protection II
 Protection degree IP20
 4 wires system

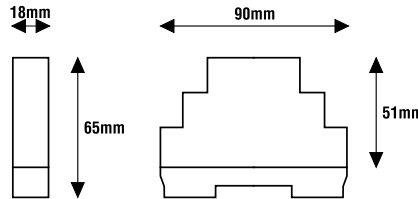


ON-OFF PUSH 230Vac	OUT BISTABILE	OUT RELE
--------------------------	------------------	-------------

CODICE CODE	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico per LED Electronic driver for LED 230/300W	Lampade fluorescenti con alimentatore elettromeccanico rifasato Fluorescent lamps with electromechanical driver with power factor correction 230Vac	Lampade fluorescenti compatte Compact fluorescent lamps 230Vac	Lampade LED LED lamps 230Vac	Moduli LED LED modules Seoul ACRICH 230Vac	Strip LED Strip LED 230Vac	Peso Weight (g) 55
RPS400DIN	10-400W	10-300VA	10-300VA	10-300W	10-300W	20-250W	10-300W	4-300W	15-300W	4-300W	55

Push-button connection on the LINE

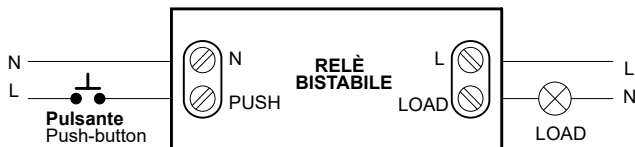

Push-button connection on the NEUTRAL

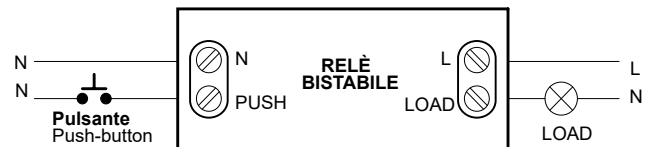

Do not connect more than one cable for each pole of the terminals.

Excessively long connecting cables in environments with strong electromagnetic disturbances can interfere with the operation of the device. In these cases it is advisable to limit the length of the cables.



Reference Standards

EN 60669-1
 EN 60669-2-1

Push on the black tab to block



Pull or lever the black tab with a screwdriver to unlock

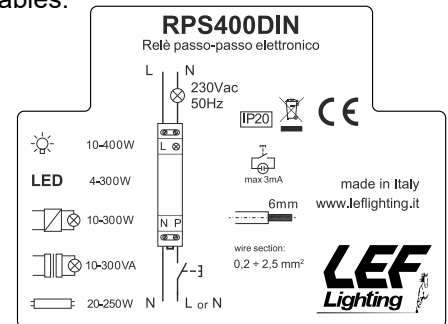

Technical Features

Input voltage range 230Vac
 Input frequency 50Hz
Electronic silent step relay
Control thorough:
 - **push-button (PUSH 230Vac)**
 Manageable power (see table)
 «STATE MEMORY» function
 «ZERO CROSSING» function
 Short circuit protection (SCP) (with internal fuse)
 Self-consumption <0,25W
 Operating ambient temperature Ta -5°C ÷ +35°C

Illuminated Push-Buttons

it is possible to use illuminated push-buttons with current of maximum dispersion 3mA.
 Some indicator lights are one-way, therefore they only work in one way; in these cases, check the correct mounting direction by doing a test.

ATTENTION:

The installation of the product must be followed by qualified personnel.
 If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.

MADE IN ITALY



PRODUCT TO BE DISPOSED DIFFERENTLY FROM URBAN WASTE
 AEE Identification nr.IT1804000010321

LEF LIGHTING S.R.L. | www.lef Lighting.it

Viale L.Ariosto 478 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92