

Relè elettronico con comando a segnale DALI Electronic relay with DALI signal control

DALI



con funzione manuale di indirizzamento canale DALI | with manual DALI channel addressing function

General Characteristics

Plastic case
Device for independent mounting
Electric class protection II
Protection degree IP20

Technical Features

Input voltage range 110-240Vac
Input frequency 50÷60Hz
Relè (max 1150W@230Vac)
Control thorough:
- DALI signal
With manual DALI channel addressing function
(via push-buttons and display)
DALI consumption <3mA
Manageable power (see table)
Short circuit protection (SCP)
Operating ambient temperature Ta -20°C ÷ +50°C
Max case temperature on Tc 75°C

Reference Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62386-101
EN 62386-102
EN 62386-207


Caratteristiche Costruttive

Contenitore plastico
Dispositivo ad uso indipendente
Classe elettrica di protezione II
Grado di protezione IP20

Caratteristiche Tecniche


Tensione di ingresso 110-240Vac
Frequenza di ingresso 50÷60Hz
Relè (max 1150W@230Vac)
Comando tramite:
- segnale DALI
Con funzione manuale di indirizzamento canale DALI
(tramite pulsanti e display)
Consumo DALI <3mA
Potenza gestibile (vedi tabella)
Protezione al corto circuito (SCP)
Temperatura ambiente di funzionamento Ta -20°C ÷ +50°C
Temperatura massima sul punto Tc 75°C

Norme di Riferimento

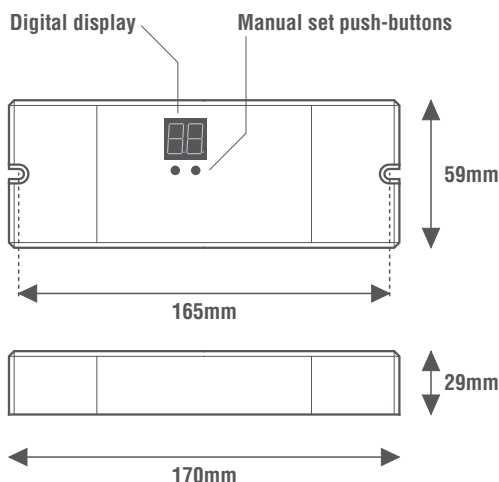

Wiring diagram

Schema elettrico

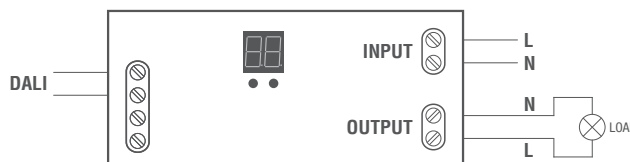

									DISPLAY	DALI 1	DALI DT6	OUT RELÈ
CODICE CODE	Funzione Function	Comando Command	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico per LED Electronic driver with CC/CV output for LED	Lampade fluorescenti compatte Compact fluorescent lamps 230Vac	Lampade LED LED lamps 230Vac	Moduli LED LED modules Seoul ACRICH 230Vac	Strip LED Strip LED 230Vac	Peso Weight (g)
SR-2701B	RELÈ	DALI	1150W	500W	500W	500W	500W	500W	500W	1150W	1150W	110

