

USER GUIDE

ALRE060SI


Electromechanical ballast for HIGH PRESSURE (H.P.) SODIUM discharge lamp 600W



www.lef Lighting.it

General Characteristics

Electromechanical reactor to be incorporated
Electric protection class I
Filled with polyester resin



N.B.

Device not suitable
for no-load operation




Reference Standards

EN 55015
EN 60923
EN 61000-3-2
EN 61347-1
EN 61347-2-9
EN 62442-2

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza lampada Power lamp (W)	Corrente lampada Current lamp (A)	Δt (°C)	Condensatore Capacitor		Accenditore Ignitor (CODE)	Dimensioni Dimensions (mm)							Peso Weight (g)
						(μF)	(CODE)		L	P	H	C	D	E	F	
senza termica no thermoprotected ALRE060SI	230	50	600	6,20	80	60	2xCPI30C	ACCAP7	120	120	100			104	99	12000

Wiring diagram with 3 wires ignitor

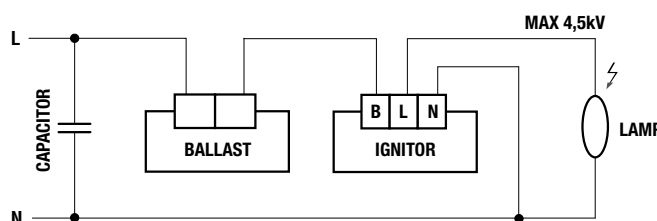

LEF LIGHTING S.R.L.
Viale L. Ariosto 478/480
50019 Sesto Fiorentino
Firenze - ITALY
www.lef Lighting.it


A2 CE

REATTORE PER LAMPADE A VAPORI DI SODIO A.P. Made in ITALY

LINEA 230 V 50 Hz	LAMPADA 600 W 6,20 A Cos ϕ 0,40	Cod. ALRE060SI
-------------------------	---	----------------

Δt 80°C tw 130°C

PER I COLLEGAMENTI ATTENERSI ALLO SCHEMA RIPORTATO SULL'ACCENDITORE

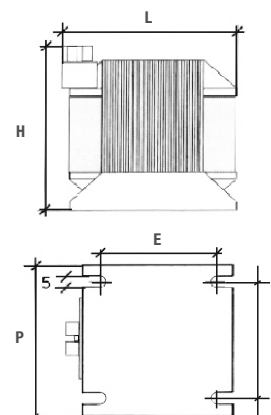

Technical Features

Input voltage range 230Vac
Input frequency 50Hz

Reactor 2 poles


Energy efficiency ratio (EEI): A2

Winding in class H

Maximun working temperature max 130°C

ATTENTION:

The installation of the product must be followed by qualified personnel.
If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.



MADE IN ITALY

LEF LIGHTING S.R.L. | www.lef Lighting.it

Viale L. Ariosto 478/480 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92