

USER GUIDE

Code: MINILED30

Electronic transformer for halogen and LED lamps 12Vac




General Characteristics


Plastic case
Driver for independent mounting
Electric class protection II
Protection degree IP20

Reference Standards:


EN 50082-1
EN 55015
EN 61000-3-2
EN 61347-2-2
EN 61547

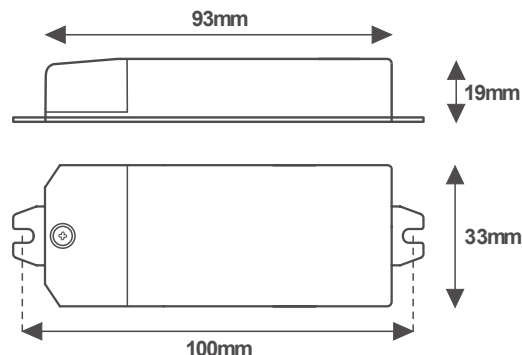

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza di uscita Output power (W)	Tensione di uscita Output voltage (Vac)	Frequenza di uscita Output voltage (Khz)	PFC (λ)	Peso Weight (g)
MINILED30	220-240	50÷60	1-30	12	40	0,93	85

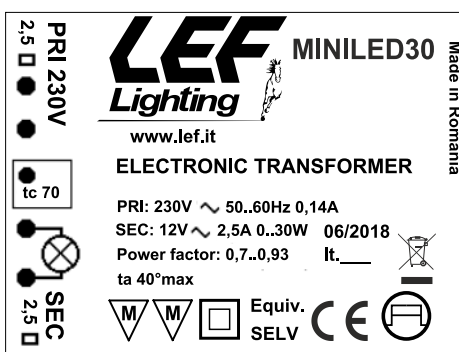

Wiring diagrams

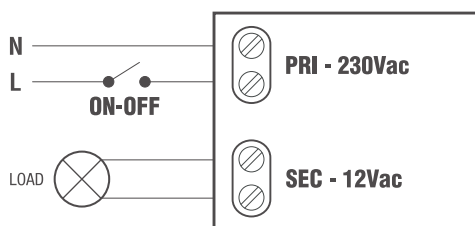

OUT HF
40KHz

Connectable LED lamps must admit a 12Vac power supply in high frequency (HF) or one operating indication with electronic transformer

Technical Features

Input voltage range 220-240Vac
Input frequency 50÷60Hz
Voltage output 12Vac
Output frequency 40KHz
Protection against mains overvoltage
Short circuit protection (SCP)
Power factor correction (PFC) $\lambda \geq 0,93$
Operating ambient temperature $T_a -10^{\circ}\text{C} \div +40^{\circ}\text{C}$
Max case temperature on $T_c 70^{\circ}\text{C}$

Attention:

The installation of the product must be followed by qualified personnel.

If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages aused.



PRODUCT TO BE DISPOSED
DIFFERENTLY FROM URBAN WASTE

AEE Identification nr.IT18040000010321

MADE IN ROMANIA



LEF LIGHTING S.R.L.

Via Rodolfo Morandi, 9/11 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92 | www.lef.it