

USER GUIDE


Code: LE20MCL

CONSTANT CURRENT LED DRIVER



General Characteristics

Plastic case
Driver for independent mounting
Electric class protection II
Protection degree IP20


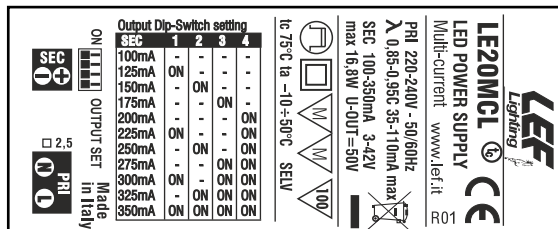


Reference Standards

EN 55015
EN 61000-3-2
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Corrente di uscita Output current (mA)	1	2	3	4
100	-	-	-	-
125	ON	-	-	-
150	-	ON	-	-
175	-	-	ON	-
200	-	-	-	ON
225	ON	-	-	ON
250	-	ON	-	ON
275	-	-	ON	ON
300	ON	-	ON	ON
325	-	ON	ON	ON
350	ON	ON	ON	ON

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza di uscita Output power (W)	Tensione di uscita Output voltage (Vdc)	Corrente di uscita Output current (mA)	PFC (λ)	CC CV	Peso Weight (g)
LE20MCL	220-240	50÷60	4,2	3-42	100	0,85	CC	100
			5,3		125	0,87		
			6,3		150	0,89		
			7,4		175	0,90		
			8,4		200	0,91		
			9,5		225	0,92		
			10,5		250			
			11,6		275	0,93		
			12,6		300			
			13,7		325	0,95		
			14,7		350			

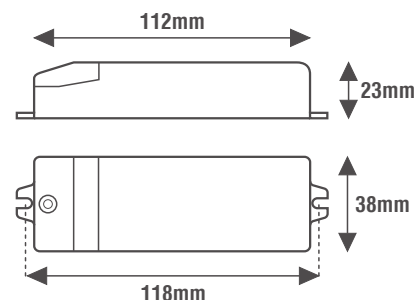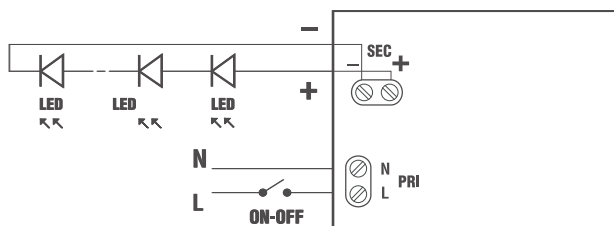

Technical Features

Input voltage range 220-240Vac
Input frequency 50÷60Hz
Constant current output 100÷350mA
(settings by dip-switch)
Factory setting: 350mA
Open circuit Protection (OCP)
Overload protection (OLP)
Protection against overtemperature (OTP)
Short circuit protection (SCP)
Power factor correction (PFC) $\lambda \geq 0,85$
Operating ambient temperature $T_a -10^{\circ}\text{C} \div +50^{\circ}\text{C}$
Max case temperature on $T_c 75^{\circ}\text{C}$

ATTENTION:

The installation of the product must be followed by qualified personnel.
If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.



MADE IN ITALY

PRODUCT TO BE DISPOSED
DIFFERENTLY FROM URBAN WASTE

AEE Identification nr.IT18040000010321



LEF LIGHTING S.R.L. | www.lefgroup.com

Via Rodolfo Morandi, 9/11 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92