

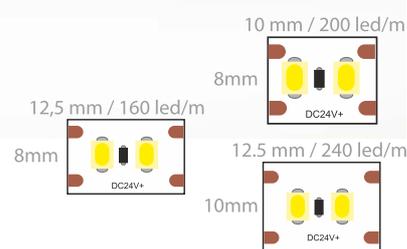
9,6/22  
Watt/m

IP 65

CRI&gt;95

t<sub>a</sub> -10° ÷ +40°C

Free Cut

up to  
**120 lm/w**

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41K24160A27	2700K	1043		160	24V/DC	FREE	9,6W	IP65	E
A41K24160A30	3000K	1077		160	24V/DC	FREE	9,6W	IP65	E
A41K24160A40	4000K	1130		160	24V/DC	FREE	9,6W	IP65	E
A41K24200A27	2700K	1825		200	24V/DC	FREE	16,8W	IP65	E
A41K24200A30	3000K	1868		200	24V/DC	FREE	16,8W	IP65	E
A41K24200A40	4000K	2077		200	24V/DC	FREE	16,8W	IP65	E
A41K24240A27 4m	2700K	2564		240	24V/DC	FREE	22W	IP65	E
A41K24240A30 4m	3000K	2607		240	24V/DC	FREE	22W	IP65	E
A41K24240A40 4m	4000K	2659		240	24V/DC	FREE	22W	IP65	E

\*\* The EEC specification refers in each case to the installed LED light source(s)

### 🇮🇹 Strisce flessibili a LED 24V autoadesive IP65

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- 160 led/m - 9,6W/m Taglio libero - Punto di saldatura per collegamento cavo ogni 12,5mm
- 200 led/m - 16,8W/m Taglio libero - Punto di saldatura per collegamento cavo ogni 10mm
- 240 led/m - 22W/m - Taglio libero - Punto di saldatura per collegamento cavo ogni 12,5mm
- Disponibile nei colori standard 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

### 🇬🇧 24V Flexible adhesive LED strips IP65

- LED 2835 with high lumen efficiency and low voltage drop
- 160 led/m - 9,6W/m Free cutting - Soldering pad for wire connection every 12,5mm
- 200 led/m - 16,8W/m Free cutting - Soldering pad for wire connection every 10mm
- 240 led/m - 22W/m Free cutting - Soldering pad for wire connection every 12,5mm
- Available in standard 2700K, 3000K and 4000K
- Supplied in 5m roll with connecting cable