

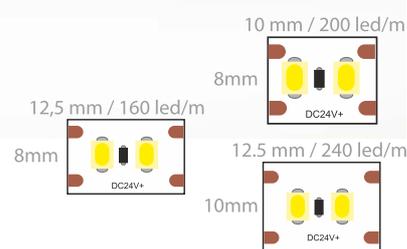
9,6/22  
Watt/m

IP 20

CRI&gt;95

t<sub>a</sub> -10° ÷ +40°C

Free Cut

up to  
**140 lm/w**

Part Number	CCT (K)	Lumen/m	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41K24160027	2700K	1200	160	24V/DC	FREE	9,6W	IP20	E
A41K24160030	3000K	1240	160	24V/DC	FREE	9,6W	IP20	E
A41K24160040	4000K	1300	160	24V/DC	FREE	9,6W	IP20	E
A41K24200027	2700K	2100	200	24V/DC	FREE	16,8W	IP20	E
A41K24200030	3000K	2150	200	24V/DC	FREE	16,8W	IP20	E
A41K24200040	4000K	2390	200	24V/DC	FREE	16,8W	IP20	E
A41K24240027 4m	2700K	2950	240	24V/DC	FREE	22W	IP20	E
A41K24240030 4m	3000K	3000	240	24V/DC	FREE	22W	IP20	E
A41K24240040 4m	4000K	3060	240	24V/DC	FREE	22W	IP20	E

\*\* The EEC specification refers in each case to the installed LED light source(s)

### Strisce flessibili a LED 24V autoadesive IP20

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- 160 led/m - 9,6W/m Taglio libero - Punto di saldatura per collegamento cavo ogni 12,5mm
- 200 led/m - 16,8W/m Taglio libero - Punto di saldatura per collegamento cavo ogni 10mm
- 240 led/m - 22W/m - Taglio libero - Punto di saldatura per collegamento cavo ogni 12,5mm
- Disponibile nei colori standard 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

### 24V Flexible adhesive LED strips IP20

- LED 2835 with high lumen efficiency and low voltage drop
- 160 led/m - 9,6W/m Free cutting - Soldering pad for wire connection every 12,5mm
- 200 led/m - 16,8W/m Free cutting - Soldering pad for wire connection every 10mm
- 240 led/m - 22W/m Free cutting - Soldering pad for wire connection every 12,5mm
- Available in standard 2700K, 3000K and 4000K
- Supplied in 5m roll with connecting cable