

FARO-500/ONE



OneSmart

Lampada da esterno.

Modulo LED 230Vac non dimmerabile.

Elettronica di comando MCU-L1/ONE integrata.


Outdoor lamp.

Not dimmable 230Vac LED module.

Integrated MCU-L1/ONE electronic control unit.

1. DATI TECNICI

Codice	FARO-500/ONE
Alimentazione	220-240V
Potenza	7W
Temperatura della luce	3000K
Grado di protezione	IP54

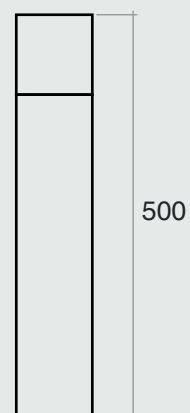


2. COLLEGAMENTI ELETTRICI

- Togliere la base di fondazione svitando le 3 viti laterali per accedere ai collegamenti.
- Aprire la scatola di derivazione.




- Svitare l'ottica della lampada (1) e rimuovere il corpo luce per accedere al box con l'elettronica di controllo.
- Collegare l'alimentazione 230Vac sulla morsetteria
- Per le programmazioni fare riferimento al manuale della centrale elettronica MCU-L1/ONE.



1. TECHNICAL DATA

Power supply	FARO-500/ONE
Power supply	220-240V
Power	7W
Light temperature	3000K
Degree of protection	IP54

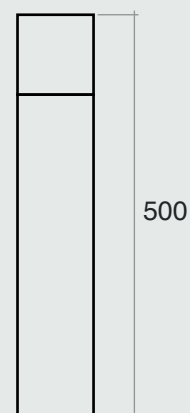


2. ELECTRICAL CONNECTION

- Remove the foundation base by unscrewing the 3 lateral screws to access the connections.
- Open the junction box.



- Unscrew the optics of the lamp (1) and remove the light body to access the box with the control units.
- Connect the 230Vac power supply to the terminal board
- For programming, refer to the MCU-L1/ONE electronic control unit manual.



CE



LEF
Lighting



LEF LIGHTING S.R.L.

Via Rodolfo Morandi 9/11

50019 Sesto Fiorentino

Tel. 055.4217727

Firenze - ITALY

www.leflighting.it