

USER GUIDE

LE12024SLIM


Constant voltage LED driver



www.leflighting.it

General Characteristics

Plastic case (SLIM)
Driver for independent mounting
Electric class protection II
Protection degree IP20

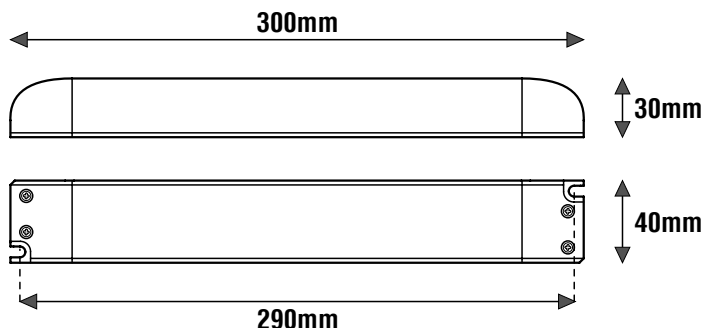

Reference Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

 www.leflighting.it	Un	In	fn	λ	Uo	Io	ta	tc
	220-240VAC	0.54-0.7A	50/60Hz	0.95	24VDC	5A Max	-20...+45°C	90°C



SLIM

LED

EE
89%



CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza di uscita Output power (W)	Comando Command	Tensione di uscita Output voltage (Vdc)	Corrente di uscita Output current (mA)	PFC (λ)	CC CV	Peso Weight (g)
LE12024SLIM	220-240	50÷60	120	ON-OFF	24	5000	0,95	CV	400

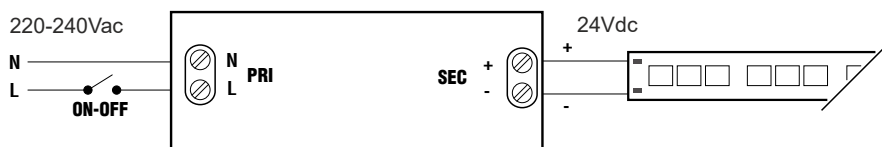

N.B.

Power supply not suitable for no-load operation.

ATTENTION:

The installation of the product must be followed by qualified personnel. If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.

Caratteristiche Tecniche

Input voltage range 220-240Vac
Input frequency 50÷60Hz
Constant voltage output 24Vdc
Energy Efficiency (EE) 89%
Open circuit protection (OCP)
Protection against overvoltage (OVP)
Short circuit protection (SCP)
Power factor correction (PFC) $\lambda \geq 0,95$
Operating ambient temperature Ta -20°C ÷ +45°C
Max case temperature on Tc 90°C



MADE IN P.R.C.



PRODUCT TO BE DISPOSED DIFFERENTLY FROM URBAN WASTE
AEE identification nr.IT1804000010321



LEF LIGHTING S.R.L. | www.leflighting.it

Via Rodolfo Morandi, 9/11 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92