

# USER GUIDE

## LESDC230

Residual current suppression device





www.lef Lighting.it

### General characteristics


Plastic case  
Completely sealed electronic board  
Electric class protection II  
Protection degree IP54  
PVC cables length 100mm

### Reference Standards

EN 60669-2-5

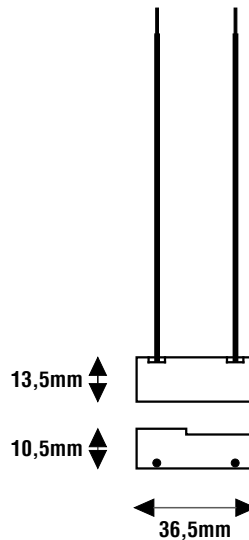

CODICE CODE	Tensione di ingresso Input voltage (Vac)	Frequenza di rete Input frequency (Hz)	Potenza dissipata Dissipated power (W)	Funzione Function	Peso Weight (g)
<b>LESDC230</b>	220-240	50÷60	<b>1,3</b>	<b>SOPPRESSORE DI CORRENTE RESIDUA</b>	10

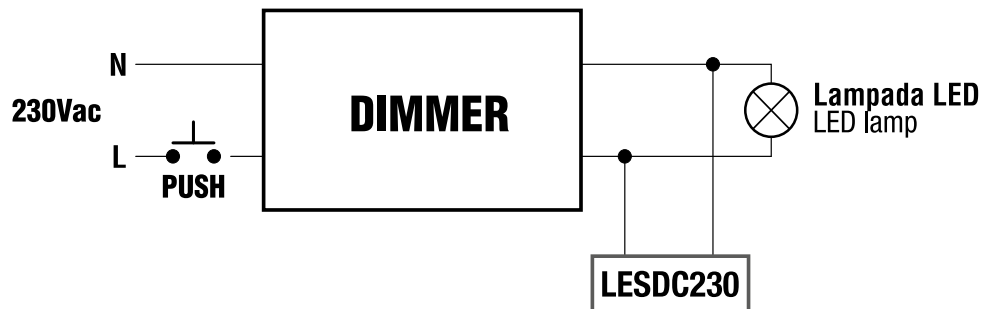

### Technical Features

Input voltage range 220-240Vac  
Input frequency 50÷60Hz  
Power dissipation 1,3W

**This device can be used to eliminate the residual brightness of the LED lamps after switching off the dimmers.**

**This device can be used to stabilize the brightness of the 230Vac LED strips (dimnable) connected to a dimmer.**

Operating ambient temperature  $T_a$   $-10^{\circ}\text{C} \div +40^{\circ}\text{C}$   
Maximum temperature at the  $T_c$  point  $50^{\circ}\text{C}$

### ATTENTION:

The installation of the product must be followed by qualified personnel.  
If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.



PRODUCT TO BE DISPOSED DIFFERENTLY  
FROM URBAN WASTE  
AEE identification nr.IT1804000010321



MADE IN ITALY

