

Relè passo-passo (bistabile) elettronico con comando a pulsante

Electronic (bistable) step relay with push-button control

PUSH



NEW

con funzione **BISTABILE** | with **BISTABLE** function

General Characteristics


DIN rail plastic case (1 module)
Electric class protection II
Protection degree IP20
4 wires system

Technical Features

Input voltage range 230Vac
Input frequency 50Hz
Silent electronic bistable step relay
Control thorough:
- **push-button (PUSH 230Vac)**
Manageable power (see table)
«STATE MEMORY» function (open contact after black-out)
«ZERO CROSSING» function
Short circuit protection (SCP) (with internal fuse)
Self-consumption <0,5W
Operating ambient temperature Ta -5°C ÷ +35°C

Reference Standards

EN 60669-1
EN 60669-2-1

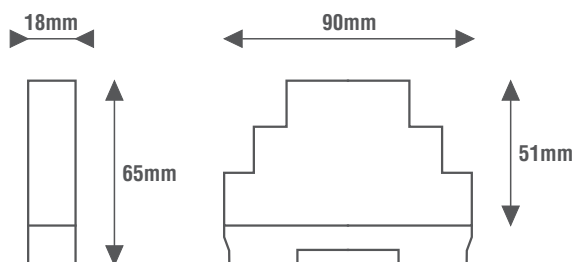

Caratteristiche Costruttive

Contenitore plastico a barra DIN (1 modulo)
Classe elettrica di protezione II
Grado di protezione IP20
Sistema a 4 fili

Caratteristiche Tecniche

Tensione di ingresso 230Vac
Frequenza di ingresso 50Hz
Relè passo-passo bistabile elettronico silenzioso
Comando tramite:
- **pulsante (PUSH 230Vac)**
Potenza gestibile (vedi tabella)
Funzione «MEMORIA DI STATO» (contatto aperto dopo black-out)
Funzione «ZERO CROSSING»
Protezione al cortocircuito (SCP) (con fusibile interno)
Autoconsumo <0,5W
Temperatura ambiente di funzionamento Ta -5°C ÷ +35°C

Norme di Riferimento




Wiring diagrams

Schema elettrico

Collegamento del Pulsante sul NEUTRO
Push-button connection on the NEUTRAL



Collegamento del Pulsante sulla FASE
Push-button connection on the LINE

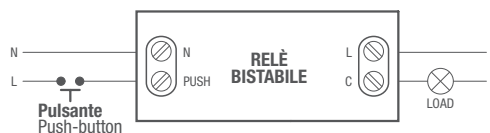

ON-OFF PUSH 230Vac	OUT BISTABILE	OUT RELÈ
--------------------------	------------------	-------------

CODICE CODE	Funzione Function	Comando Command	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico per LED Electronic driver for LED 10-300W	Lampade fluorescenti compatte Compact fluorescent lamps 230Vac	Lampade LED LED lamps 230Vac	Moduli LED LED modules Seoul ACRICH 230Vac	Strip LED Strip LED 230Vac	Peso Weight (g) 55
RPS400DIN	RELÈ	PUSH	10-400W	10-300VA	10-300VA	10-300W	10-300W	10-300W	4-300W	15-300W	4-300W	55

