

Caratteristiche Costruttive

Esecuzione protetta in cassetta isolante
Cassetta con materiale autoestinguente
Maniglia per il sollevamento
Piedini in gomma per appoggio
Protezione da cortocircuito
Protezione da sovraccarico
Fusibile in Uscita
Ingresso: cordone 2m e spina
Uscita: Presa CEE bassa tensione 24Vac IP67
Grado di Protezione IP55
Classe Isolamento Termica F
Classe Elettrica di protezione II



Caratteristiche Tecniche

Tensione Primaria: 0.230V
Tensione Secondaria: 0.24V
Trasformatore con flangia intermedia
Frequenza: 50-60Hz
Temperatura ambiente max: 35°C fino a 350VA
Temperatura ambiente max: 25°C da 400VA a 2000VA



General Characteristics

Protected execution in insulating box
Box with self-extinguishing material
Lifting handle
Rubber feet for support
Short circuit protection
Overload Protection
Output Fuse
Input: 2m cord and plug
Output: 24Vac low voltage CEE socket IP67
Protection degree IP55
Thermal Insulation class F
Electric class protection II

Technical Features

Primary Voltage: 0.230V
Secondary Voltage: 0.24V
Transformer with intermediate flange
Frequency: 50-60Hz
Max ambient temperature max: 35°C until to 350VA
Max ambient temperature max: 25°C from 400VA to 350VA


Norme di riferimento

EN 61558-1-2-6

Reference standards

EN 61558-1-2-6

IP55

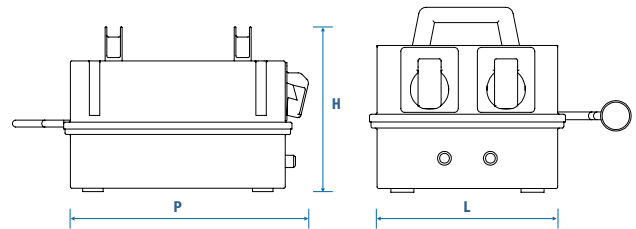

CODICE CODE	POTENZA POWER	N° PRESE USCITA CEE N° OUTPUT SOCKET CEE	I max per PRESA I max FOR SOCKET	PESO WEIGHT	DIMENSIONI (mm) DIMENSIONS (mm)		
					(L)	(P)	(H)
(Art.)	(VA)	(NR.)	(A)	(KG)			
TPA010	100	1x (16A)	4,16	3,0	110	160	200
TPA020	200	1x (16A)	8,30	4,5	110	160	200
TPA030	300	1x (16A)	12,5	5,5	150	260	200
TPA040	400	1x (16A)	16,0	6,5	150	260	200
TPA050	500	1x (16A)	20,8	8,0	150	260	200
TPA060	600	1x (16A)	25,0	8,6	150	310	360
TPA080	800	2x (16A)	16,0	15,5	150	310	360
TPA100	1000	2x (32A)	32,0	17,0	150	310	360
TPA150	1500	2x (32A)	32,0	22,0	200	360	550
TPA200	2000	3x (32A)	32,0	24,5	200	360	550