

# ISTRUZIONI D'USO PROGLECVCC

## PROGRAMMATORE PER PRODOTTI "LECV" E "LECC"

### Caratteristiche Costruttive

- Alimentazione a batterie 3xAAA (non incluse)



### Caratteristiche Tecniche

- Tramite questo dispositivo si possono impostare gli indirizzi DMX dei seguenti prodotti:

LECV1248SX  
LECV1248X4CH  
LECC035X  
LECC050X  
LECC070X  
LECC105X  
LECCADJX  
LECCADJX4CH

- Tramite questo dispositivo si può impostare la corrente di uscita dei seguenti prodotti:

LECCADJDP  
LECCADJDPB  
LECCADJDPX  
LECCADJX  
LECCADJ104CH  
LECCADJD4CH  
LECCADJPB4CH  
LECCADJX4CH  
LECCADJSHOW

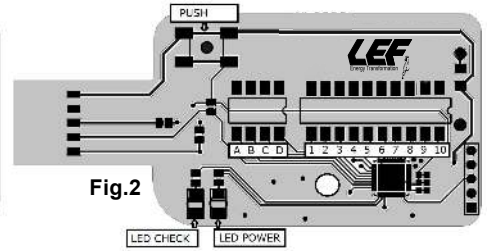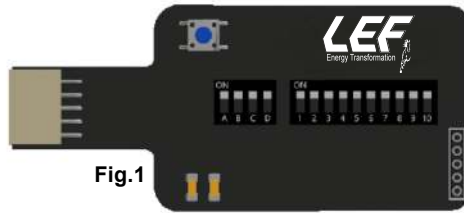

- Il dispositivo PROGLECVCC è un'interfaccia di programmazione parametri per i dimmer della famiglia LECV/LECC
- L'interfaccia PROGLECVCC è dotata di N. 2 blocchi di DIP SWITCH, il primo blocco, contrassegnato dalle lettere A-B-C-D identifica il codice COMANDO PARAMETRO, il secondo blocco contrassegnato dai numeri dall' 1 a 10 identifica il VALORE PARAMETRO.
- Il pulsante contrassegnato da PUSH serve per avviare la procedura di programmazione.
- Il led POWER avvisa della corretta alimentazione
- Il led CHECK conferma l'avvenuta programmazione del COMANDO/PARAMETRO sul dispositivo
- L'interfaccia PROGLECVCC può essere utilizzata per programmare i parametri dei dimmer a cui è connesso tramite l'alimentazione del dimmer oppure tramite batterie.
- In caso di utilizzo con dimmer alimentati, è necessario utilizzare l'interfaccia PROGLECVCC senza l'utilizzo delle batterie.
- Per un utilizzo con dimmer non alimentato è possibile inserire nel vano posteriore porta batterie N° 3 batterie AAA (alcaline 1,5V o ricaricabili 1,2V).
- In questo modo il programmatore PROGLECVCC alimenterà il dimmer e sarà possibile programmare senza alimentare esternamente il dimmer.



### ESEMPIO DI INSERIMENTO DEL PROGRAMMATORE NEI DISPOSITIVI

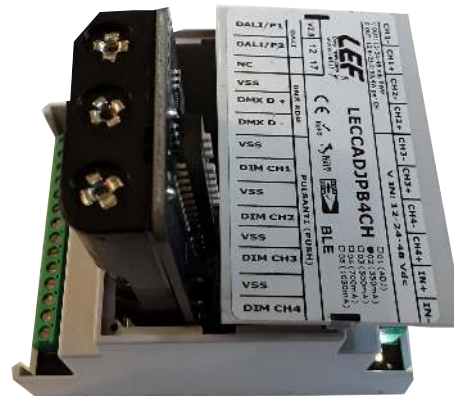


Fig.3

### PROGRAMMAZIONE DEI DISPOSITIVI

La programmazione è semplice e rapida.

- 1) Consultare il manuale del dimmer da programmare per individuare l'impostazione desiderata (es: modo di funzionamento, corrente, configurazione protocollo DMX etc etc).
- 2) Impostare il programmatore come indicato dal manuale del dispositivo.
- 3) Inserire il programmatore nell'apposito connettore posizionato sul dimmer (figura n. 3).
- 4) Controllare che il POWER LED sia acceso.
- 5) Premere e tenere premuto il pulsante PUSH per programmare il dimmer.
- 6) Entrambi i LED si accenderanno per confermare l'avvenuta programmazione.
- 7) Spegnerne e riaccendere il dimmer.

Normative di riferimento:  
EN 55015

Il Programmatore PROGLECVCC può programmare un solo parametro alla volta.

MADE IN ITALY

Ripetere le operazioni descritte per ogni parametro che si vuole impostare sul dimmer.

Rev. V 1.00 26/05/2017

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



## PROCEDURA DI PROGRAMMAZIONE CON PROGLEVCC

- 1) Impostare il programmatore a seconda dell'indirizzo DMX che si vuole assegnare (vedi tabella).
- 2) Inserire il programmatore nell'apposito connettore posizionato sul dimmer (ad es. come in Fig.1 e Fig.2).
- 3) Controllare che il POWER LED sia acceso.
- 4) Premere e tenere premuto il pulsante PUSH per programmare il dimmer.
- 5) Entrambi i LED si accenderanno per confermare l'avvenuta programmazione.
- 6) Spegnerne e riaccendere il dimmer.

**N.B. Prima di programmare i canali DMX settare i dip-switch A,B,C,D sulla seguente impostazione:**

A	B	C	D
OFF	ON	OFF	ON

In caso contrario il prodotto perde la sua programmazione.  
(In questo caso contattare l'ufficio tecnico LEF LIGHTING)

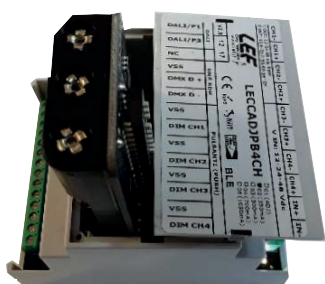


Fig.1

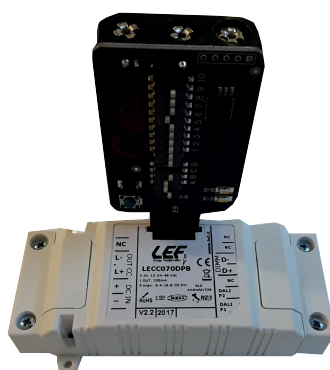


Fig.2



PROGLEVCC

Configurazioni	Indirizzo DMX													
	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Indirizzo 1	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 2	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 3	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 4	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 5	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 6	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 7	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 8	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 9	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 10	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 11	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 12	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 13	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 14	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 15	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 16	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 17	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 18	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 19	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 20	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 21	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 22	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 23	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 24	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 25	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 26	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 27	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 28	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 29	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 30	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 31	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 32	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 33	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 34	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 35	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 36	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 37	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 38	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 39	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 40	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 41	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 42	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 43	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 44	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 45	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 46	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 47	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 48	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 49	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 50	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 51	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 52	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 53	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 54	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 55	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 56	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 57	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 58	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 59	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 60	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 61	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 62	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 63	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 64	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 65	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 66	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 67	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 68	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 69	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 70	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 71	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 72	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 73	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 74	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 75	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 76	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 77	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 78	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 79	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 80	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 81	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 82	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 83	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 84	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 85	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 86	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 87	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 88	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 89	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 90	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 91	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 92	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 93	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 94	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 95	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 96	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 97	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 98	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 99	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 100	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 101	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 102	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 103	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 104	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 105	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 106	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 107	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 108	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 109	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 110	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 111	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 112	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 113	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 114	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 115	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 116	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 117	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 118	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 119	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 120	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 121	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 122	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 123	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 124	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 125	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 126	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 127	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 128	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 129	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 130	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 131	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 132	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 133	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 134	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 135	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 136	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 137	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 138	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 139	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 140	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 141	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 142	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 143	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 144	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 145	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 146	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 147	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 148	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 149	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 150	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 151	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 152	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 153	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 154	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 155	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 156	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 157	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 158	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 159	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 160	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 161	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 162	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 163	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 164	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 165	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 166	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 167	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 168	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 169	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 170	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 171	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 172	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 173	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 174	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 175	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 176	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 177	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 178	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 179	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 180	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 181	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 182	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 183	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 184	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 185	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 186	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 187	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 188	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 189	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 190	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 191	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 192	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 193	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 194	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 195	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 196	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 197	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 198	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 199	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 200	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 201	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 202	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 203	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 204	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 205	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 206	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 207	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 208	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 209	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 210	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 211	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 212	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 213	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 214	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 215	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 216	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 217	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 218	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 219	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 220	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 221	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 222	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 223	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 224	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 225	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 226	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 227	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 228	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 229	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 230	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 231	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 232	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 233	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 234	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 235	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 236	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 237	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 238	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 239	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 240	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 241	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 242	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 243	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 244	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 245	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 246	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 247	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 248	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 249	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 250	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 251	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 252	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 253	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 254	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 255	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 256	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 257	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 258	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 259	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 260	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 261	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 262	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 263	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 264	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 265	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 266	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 267	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 268	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 269	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 270	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 271	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 272	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 273	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 274	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 275	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 276	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 277	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 278	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 279	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 280	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 281	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 282	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 283	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 284	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 285	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 286	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 287	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 288	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 289	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 290	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 291	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 292	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 293	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 294	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 295	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 296	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 297	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 298	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 299	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 300	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 301	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 302	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 303	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 304	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 305	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 306	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 307	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 308	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 309	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 310	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 311	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 312	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 313	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 314	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 315	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 316	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 317	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 318	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 319	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 320	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 321	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 322	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 323	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 324	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 325	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF



# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 326	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 327	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 328	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 329	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 330	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 331	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 332	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 333	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 334	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 335	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 336	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 337	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 338	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 339	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 340	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 341	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 342	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 343	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 344	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 345	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 346	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 347	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 348	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 349	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 350	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 351	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 352	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 353	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 354	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 355	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 356	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 357	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 358	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 359	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 360	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 361	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 362	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 363	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 364	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 365	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 366	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 367	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 368	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 369	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 370	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 371	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 372	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 373	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 374	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 375	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 376	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 377	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 378	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 379	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 380	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 381	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 382	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 383	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 384	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 385	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 386	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 387	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 388	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 389	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 390	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 391	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 392	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 393	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 394	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 395	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 396	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 397	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 398	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 399	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 400	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 401	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 402	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 403	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 404	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 405	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 406	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 407	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 408	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 409	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 410	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 411	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 412	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 413	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 414	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 415	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 416	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 417	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 418	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 419	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 420	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 421	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 422	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 423	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 424	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 425	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 426	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 427	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 428	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 429	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 430	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 431	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 432	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 433	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 434	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 435	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 436	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 437	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 438	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 439	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 440	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 441	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 442	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 443	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 444	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 445	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 446	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 447	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 448	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 449	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 450	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 451	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 452	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 453	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 454	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 455	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 456	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 457	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 458	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 459	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 460	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 461	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 462	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 463	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 464	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 465	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 466	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 467	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 468	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 469	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 470	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 471	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 472	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 473	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 474	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 475	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 476	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 477	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 478	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF

# ISTRUZIONI INDIRIZZAMENTO DMX

LECV1248SX, LECV1248X4CH, LECC035X, LECC050X,  
LECC070X, LECC105X, LECCADJX, LECCADJX4CH



Indirizzo 479	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 480	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 481	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 482	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 483	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 484	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 485	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 486	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 487	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 488	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 489	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 490	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 491	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 492	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 493	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 494	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 495	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 496	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 497	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 498	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 499	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 500	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 501	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 502	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 503	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 504	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 505	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 506	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 507	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 508	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 509	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 510	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 511	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 512	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON