

# Relè monostabile elettronico con comando a pulsante

## Electronic monostable relay with push-button control

**PUSH**



con funzione **MONOSTABILE** | with monostable function

### General Characteristics

Plastic case  
Filled with polyurethane resin  
Electric class protection II  
4 wires system

### Technical Features

Input voltage range 230Vac  
Input frequency 50Hz  
**Silent electronic monostable relay**  
**Control thorough:**  
- **push-button (PUSH 230Vac)**  
Manageable power (see table)  
«ZERO CROSSING» function  
No consumption  
Operating ambient temperature Ta -5°C ÷ +35°C

### Reference Standards

EN 60669-1  
EN 60669-2-1



### Caratteristiche Costruttive

Contenitore plastico  
Resinato con resina poliuretanic  
Classe elettrica di protezione II  
Sistema a 4 fili

### Caratteristiche Tecniche

Tensione di ingresso 230Vac  
Frequenza di ingresso 50Hz  
**Relè monostabile elettronico silenzioso**  
**Comando tramite:**  
- **pulsante (PUSH 230Vac)**  
Potenza gestibile (vedi tabella)  
Funzione «ZERO CROSSING»  
No autoconsumo  
Temperatura ambiente di funzionamento Ta -5°C ÷ +35°C


### Norme di Riferimento

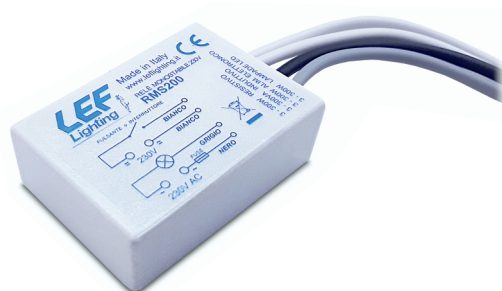

### Wiring diagrams

### Schema elettrico

Collegamento del pulsante sul NEUTRO  
Push-button connection on the NEUTRAL

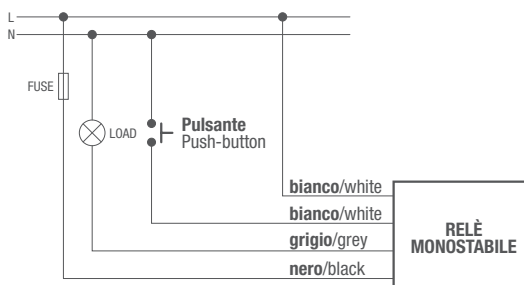

ON PUSH 230Vac	OUT MONO STABILE	OUT RELÈ
----------------------	------------------------	-------------

CODICE CODE	Funzione Function	Comando Command	RESISTIVO RESISTIVE  Lampade ad incandescenza o alogene Incandescent or halogen lamps  230Vac	INDUTTIVO INDUCTIVE  Trasformatore lamellare Laminated transformer  230/12Vac	INDUTTIVO INDUCTIVE  Trasformatore toroidale Toroidal transformer  230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps  230/12Vac	Alimentatore elettronico per LED Electronic driver for LED  230/12Vac	Lampade fluorescenti compatte Compact fluorescent lamps  230Vac	Lampade LED LED lamps  230Vac	Peso Weight (g)
<b>RMS200</b>	<b>RELÈ MONOSTABILE</b>	<b>PUSH</b>	3-300W	3-300VA	3-300VA	3-300W	3-300W	3-300W	3-300W	40

