

USER GUIDE

SR-2701S


Electronic relay with DALI signal control



www.lef-lighting.it

General Characteristics


Plastic case
Device not for independent mounting
Electric class protection II
Protection degree IP20

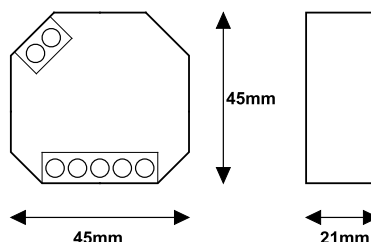

Reference Standards

EN 62386-101
EN 62386-102
EN 62386-207

CODICE CODE	Funzione Function	Comando Command	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico per LED Electronic driver for LED 300W	Lampade fluorescenti compatte Compact fluorescent lamps 230Vac	Lampade LED LED lamps 230Vac	Moduli LED LED modules Seoul ACRICH 230Vac	Strip LED Strip LED 230Vac	Peso Weight (g)
SR-2701S	RELÈ	DALI	1000W	300W	300W	300W	300W	300W	300W	1000W	1000W	15

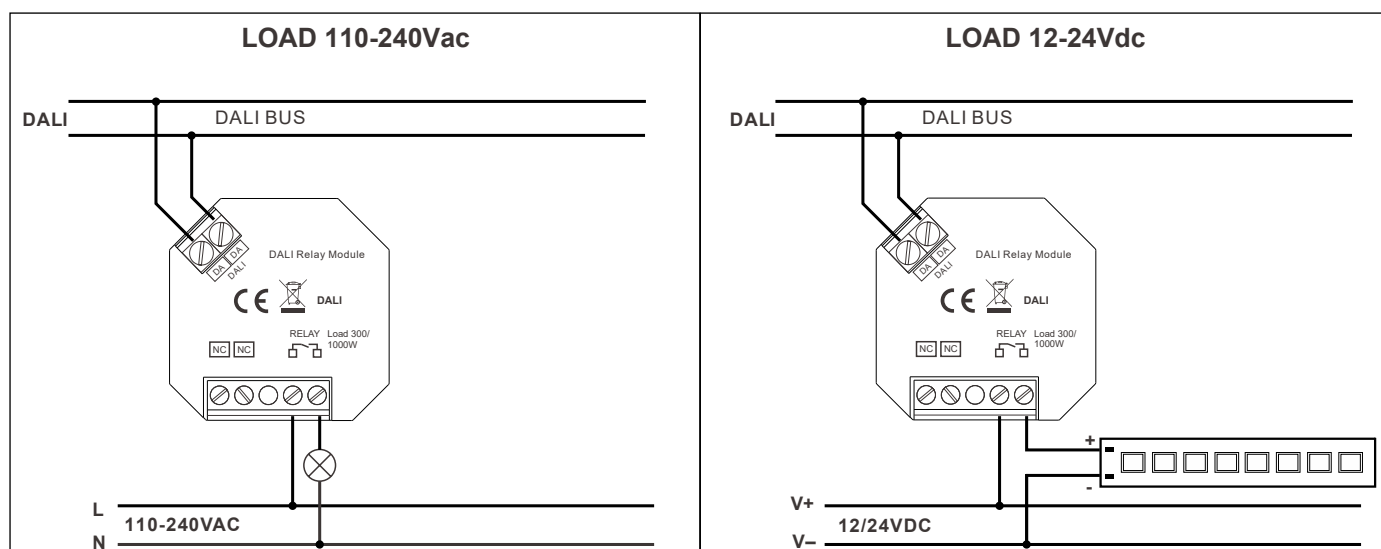

Technical Features

Input voltage range 110-240Vac
Input frequency 50+60Hz
Relay (max 4,3A@230Vac, 4,3A@110Vac)

Manageable power (see table)

Input voltage range 12-24Vdc

Input frequency 0Hz

Relay (max 5A@12Vdc, 5A@24Vdc)

Manageable power (see table)

Control thorough:

- **DALI signal**

DALI consumption <3mA

DALI bus powered device, no extra power supply required.

Short circuit protection (SCP)

Operating ambient temperature Ta -20°C ÷ +50°C

Max case temperature on Tc 75°C

ATTENTION:

The installation of the product must be followed by qualified personnel.

If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. will not accept any responsibility for damages caused.



CODICE CODE	Funzione Function	Comando Command	Strip LED Strip LED 12Vdc	Strip LED Strip LED 24Vdc
SR-2701S	RELÈ	DALI	60W	120W

[AA] Rev. v1.10 05/10/2022

MADE IN P.R.C.



PRODUCT TO BE DISPOSED
DIFFERENTLY FROM URBAN WASTE
AEE Identification nr.IT18040000010321

LEF LIGHTING S.R.L. | www.lef-lighting.it

Viale L.Ariosto 478 - 50019 Sesto Fiorentino (FI) - ITALY | Tel +39 055 421 77 27 - Fax +39 055 425 44 92