

PUSH**Varialuci indipendenti da tavolo per lampade ad incandescenza e lampade LED**

Table independent dimmers for incandescent lamps and LED lamps

**Caratteristiche prodotto**
Product characteristics**AC**
230V**150**
WATT**Simboli elettrici**
Electrical symbols**Caratteristiche tecniche**
Technical Features

Tensione di ingresso 220-240Vac

Frequenza di ingresso 50÷60Hz

Comando di dimmerazione tramite:**- pulsante interno**

Adatto per:

- lampade ad incandescenza

- lampade alogene

- lampade fluorescenti compatte dimmerabili (CFL)

- lampade LED dimmerabili

Accensione e spegnimento: pressione veloce (<1sec)

Regolazione Min-Max mediante pulsante

Memorizzazione dell'ultima regolazione effettuata (anche in caso di spegnimento da presa comandata)

Spia luminosa

Input voltage range 220-240Vac

Input frequency 50÷60Hz

Dimming control through:**internal push-button**

Suitable for:

- incandescent lamps

- halogen lamps

- dimmable compact fluorescent lamps (CFL)

- dimmable LED lamps

ON and OFF: quick pressure (<1sec)

Min -Max adjustment through push-button

Memorization of the last setting made (even in case of switching-off from controlled electrical socket)

Lighting indicator

Caratteristiche costruttive
General Characteristics

Contenitore plastico

Comando a pulsante (incorporato)

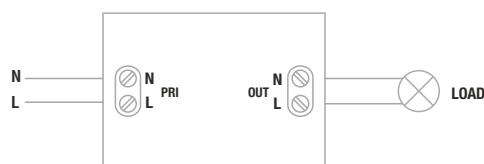
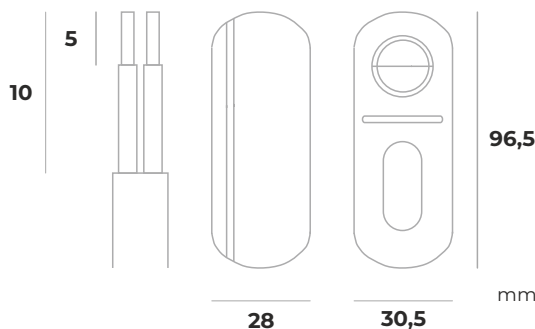
Plastic case

Push-button control (incorporated)

Norme di riferimento
Reference standards

EN 61058-1

EN 61058-2-1

Schema elettrico
Wiring diagram**Immagine prodotto e dimensioni**
Product image and dimensions**Scheda prodotto**
Product data sheet**Comando a PULSANTE**

With PUSH-BUTTON control

CODICE CODE	Colore Color	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps	INDUTTIVO INDUCTIVE Trasformatore lamellare e toroidale Laminated and toroidal transformer	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps	Alimentatore elettronico con lampade LED dimmerabili Electronic driver with dimmable LED lamps	Alimentatore elettronico con uscita in CC/CV per LED Electronic driver with CC/CV output for LED	Lampade fluorescenti compatte Compact fluorescent lamps	Lampade LED dimmerabili Dimmable LED Lamps	Moduli LED LED modules Seoul ACRICH	Peso Weight
		230Vac	230/12Vac	230/12Vac	230/12Vac		230Vac	230Vac	230Vac	(g)
DLE1004PN	Nero Black	4-150W	-	-	-	-	-	11-75W	4-60W	150
DLE1004PB	Bianco white									
DLE1004PTR	Trasparente Transparent									