

INSTRUCTIONS

Code: **EBPLC908 EBPLC909**

Multipower electronic ballasts for fluorescent lamps

Multipower electronic ballasts for fluorescent lamps.


Built in mounting type ballasts.

Electric protection class I.


Push-in terminals.

Plastic case.

CODICE CODE	LAMPADA LAMP POTENZA POWER W	N° LAMP	CORRENTE INGRESSO INPUT CURRENT (A@Vin=230Vac)	FATTORE DI POTENZA (PFC) (≥)	THD (≤ %)	CREST FACTOR (≤)	COLLEGAMENTO CONNECTION	DIMENSIONI SIZE		
								A	B	C
EBPLC908	PLC 13 W	1	0,06	0,98	10	1,7	G	123	67	30
	PLC 18 W	1	0,08	0,98	10	1,7	G	123	67	30
	PLC 26 W	1	0,11	0,98	10	1,7	G	123	67	30
	PLC 13 W	2	0,11	0,98	10	1,7	F	123	67	30
	PLC 18 W	2	0,16	0,98	10	1,7	F	123	67	30
	PLC 26 W	2	0,23	0,98	10	1,7	F	123	67	30
EBPLC909	PLT 32 W	1	0,14	0,98	10	1,7	G	123	67	30
	PLL 36 W	1	0,16	0,98	10	1,7	G	123	67	30
	PLT 42 W	1	0,18	0,98	10	1,7	G	123	67	30
	PLL 55 W	1	0,24	0,98	10	1,7	G	123	67	30
	PLT 32 W	2	0,28	0,98	10	1,7	F	123	67	30
	PLL 36 W	2	0,32	0,98	10	1,7	F	123	67	30
	PLT 42 W	2	0,37	0,98	10	1,7	F	123	67	30
	PLL 55 W	2	0,48	0,98	10	1,7	F	123	67	30

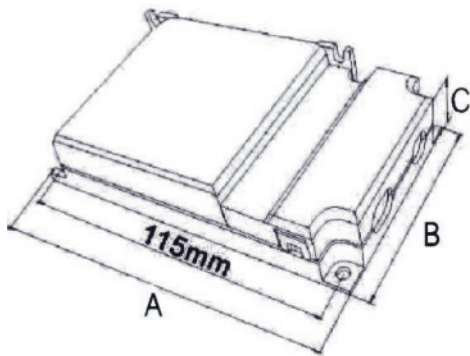


Input 220-240V~ (2X)



Connection F

Input 220-240V~ (1X)



Connection G

TECHNICAL FEATURES

Input voltage range 220-240Vac

Input frequency 50-60Hz

Power Factor Correction (PFC) $\lambda \geq 0,98$

Energy efficiency ratio (EEI): A2

Operating Ambient Temperature $T_a -10^{\circ}\text{C} \div 50^{\circ}\text{C}$

Max lamp-cable length: 2 m

Long working life >20000 ore

EMC Protection

Air Humidity (%): +5%+85%

ATTENTION:

The installation of the product must be followed by qualified personnel.

If the product is used for purposes other than the original ones or if it is connected incorrectly, LEF Lighting S.R.L. Will not accept any responsibility for damages caused.

Disconnect power source before lamp replacement or electronic ballast installation. Earth needed. Short circuit between power cables not allowed.



Use the Qrcode to download the instruction sheet on your smartphone/tablet.

Reference Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-3
EN 61547

MADE IN P.R.C.



PRODUCT TO BE DISPOSED
DIFFERENTLY FROM URBAN WASTE



LEF LIGHTING S.R.L.

Via Rodolfo Morandi, 9/11- 50019 Sesto Fiorentino (FI) - ITALY | tel +39 055 4217727 - Fax +39 055 4254492 | www.lef.it