

con comando ad **INTERRUTTORE** e a **POTENZIOMETRO a slitta** | with **SWITCH** and **slide POTENTIOMETER** control

General Characteristics

Plastic case with connection
Slider potentiometer control with push-button switch

Technical Features

Input voltage range 220-240Vac
Input frequency 50÷60Hz
Dimming control through:
- **switch**
- **slide potentiometer**
Suitable for:
- incandescent lamps
- halogen lamps
- dimmable compact fluorescent lamps (CFL)
- dimmable LED lamps
Min -Max adjustment through slide potentiometer
Memorization of the last setting made (even in case of switching-off from controlled electrical socket)
Built-in replaceable fuse T 2,5AH 250V

Reference Standards

EN 61058-1
EN 61058-2-1


Caratteristiche Costruttive

Contenitore plastico
Accensione e spegnimento mediante interruttore

Caratteristiche Tecniche

Tensione di ingresso 220-240Vac
Frequenza di ingresso 50÷60Hz
Comando di dimmerazione tramite:
- **interruttore**
- **potenziometro a slitta**
Adatto per:
- lampade ad incandescenza
- lampade alogene
- lampade fluorescenti compatte dimmerabili (CFL)
- lampade LED dimmerabili
Regolazione Min-Max mediante potenziometro a slitta
Memorizzazione dell'ultima regolazione effettuata (anche in caso di spegnimento da presa comandata)
Fusibile incorporato e sostituibile T 2,5AH 250V

Norme di Riferimento

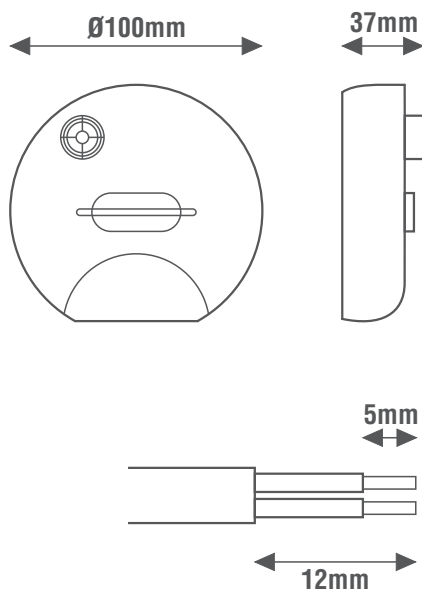

SWITCH

DIM POT

CODICE CODE	Colore Color	RESISTIVO RESISTIVE Lampade ad incandescenza o alogene Incandescent or halogen lamps 230Vac	INDUTTIVO INDUCTIVE Trasformatore lamellare Laminated transformer 230/12Vac	INDUTTIVO INDUCTIVE Trasformatore toroidale Toroidal transformer 230/12Vac	Alimentatore elettronico con lampade ad incandescenza o alogene Electronic driver with incandescent or halogen lamps 230/12Vac	Alimentatore elettronico con lampade LED dimmerabili Electronic driver with dimmable LED lamps 230/12Vac	Alimentatore elettronico dimmerabile con uscita in CC/CV per LED Dimmable electronic driver with CC/CV output for LED	Lampade fluorescenti compatte dimmerabili Dimmable compact fluorescent lamps 230Vac	Lampade LED dimmerabili Dimmable LED lamps 230Vac	Moduli LED dimmerabili Dimmable LED modules Seoul ACRICH 230Vac	Peso Weight (g) 150
DLE1012SN	Nero Black										
DLE1012SB	Bianco White	4-250W	-	-	-	-	-	11-25W	4-25W	-	150
DLE1012STR	Trasparente Transparent										

